

# Refrigerator-Freezers

**SERIES MODEL** 

# MR-L650EH, MR-L710EH


**OPERATING INSTRUCTIONS** 



# **Cleaning Instruction - Important!**

It is strongly recommended to use only lukewarm water and a soft cloth when cleaning. Cleaning agents can cause cracking to the plastic components of your refrigerator.

# **Function Overview**

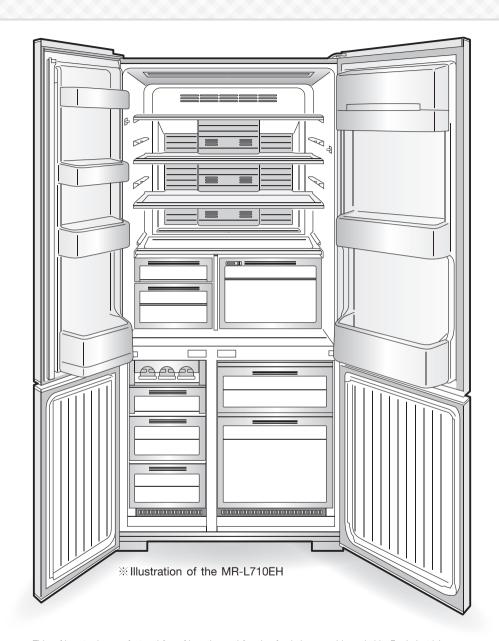

- This refrigerator is manufactured for refrigerating and freezing foods in general households. For industrial use, please use a commercial refrigerator-freezer.
- The photographs and illustrations contained in this manual are for the MR-L710EH. While the capacity and dimensions of the MR-L710EH are different from the MR-L650EH the operation is the same.
- The material names are indicated on the main plastic parts to facilitate recycling.



## Vitamin Factory

The vitamins in vegetables are boosted by the LED.

## **ECO MODE**

Use when you want to save power.

When the temperature inside the refrigerator is stable, the power-saving operation is performed automatically.

# **Contents**

	Page
Safety Precautions	4-5
From Installation to Operation	6-7
Using Control Panel	8-9
Setting the Refrigerator and Freezer compartment	10
Refrigerator Compartment	11-12
Freezer Compartment	13
Removing and Cleaning the Parts	14-15
Other Issues	16-17
Specifications	17
When in trouble	18-19

# **Safety Precautions**

Danger and degree of danger caused by improper handling are categorized and described by the following indicators.



Improper handling can result in death or serious injury.



Improper handling can result in personal injury or damage to vour house, household furnishinas, etc.

Meaning of symbols.



Never do



Never touch



Never attempt to disassemble, repair or alter



Never expose to



Never touch with wet hands



Be sure to follow the instructions



Be sure to remove the power plua from the socket



If an abnormality or malfunction occurs, stop operation

immediately and contact the retail store where you purchased the refrigerator or MITSUBISHI ELECTRIC SERVICE CENTRE or Customer Service representative.

#### Installation

Do not install the refrigerator outdoors or in places exposed to water or excessive humidity

Anchor the refrigerator to a strong

wall or post to protect against damage

If the power cord is damaged, call our MITSUBISHI

ELECTRIC SERVICE CENTRE for the replacement.

If the power cord is damaged, purchase

SERVICE CENTRE. Make sure that the

power cord is designed for this model.

a new cord from MITSUBISHI ELECTRIC

Water may cause insulation failure, resulting in an electric shock or fire.

during earthquakes.

The refrigerator may tip

over and cause injury.

▶ Pages 6 - 7

▶ Page 6



that meets the rating specified on the rating label. (The rating label is located on the door-liner of the refrigerator compartment.) Using extension cords and

Use a dedicated outlet for the power supply

plugging too many leads into a single socket can cause heat build-up or fire.

► Page 6

Only use an outlet that meets the specified rating

Insert the power plug with the cord facing down, and fully insert the prongs.





Leave space around the refrigerator. If refrigerant leaks, it

may accumulate and catch fire or explode. Page 6



#### Power and power plug

Remove the power plug before cleaning.

Do not use damaged cords or plugs, or

Remove dust periodically from the

Otherwise an electric shock or injury may

loose sockets.

electric shock or fire

power plug.

Dust may cause

insulation failure

resulting in fire

Doing so may cause an

▶ Page 6





Do not use

Do not crush the power plug with the rear of the refrigerator. Do not damage the power cord.

Pressing, folding, bundling or placing heavy objects on the power cord may cause an electric shock or fire.





# Prohibited

# electric shock or fire

wet hands. Doing so may cause an electric shock

the power plug.

damaged resulting in

The cord may be





# Warning

#### Operation Do not place water containers on top Do not use electrical appliances inside

of the refrigerator. Evanging electrical parts

Do not place objects on top of the

Do not wash with water or spill soup

When opening and closing the door.

or juice onto the refrigerator.

be careful not to let it hit any

surrounding furniture.

damaged to the door or furniture

There is a risk of injury and



refrigerator.

Objects may fall when

the doors are opened or

closed and cause injury.

Water or other liquid may

cause an electric shock


or fire. Wipe off any

liquid immediately









Do not use combustible sprays near

Do not use in a shed or garage.

Pet animals may damage the electrical

wiring and cause an electric shock or fire.

See rating label inside Refrigerator

Only use refrigerant specified

Substances that require strict control must not be stored in household refrigerators.

the refrigerator.

electrical contact may

cause an ignition and

by the company.

for refrigerant type.

Sparks from an

the refrigerator.

The refrigerant gas leaking

into the compartment with

sparks from an electrical

explosion.

contact may cause fire and





Prohibited

The refrigerator may tip over and cause injury

Renzene coemetics

and hair dressing

fire or explode

products may catch

Do not apply a heavy load.



Before

Do not damage the refrigerant circuit (piping of the refrigerator; do not drive in screws

Recause a flammable refrigerant (gas) is used, there is the danger of ianitina or explosion.





This appliance is not intended for use by young children or infirm persons unless they have bee adequately supervised by a responsible persor to ensure that they can use the appliance safely

Do not place volatile, inflammable

Do not hang from the door or handle

Do not climb on an open door.

objects inside the refrigerator.

Young children should be supervised to ensure that they do not play with



## Malfunctions and long-term storage

If an abnormality occurs (such as a burning odor), unplug the power plug and stop the refrigerator operation.

Continuing to operate with an abnormality may cause an electric shock













If there is a possibility of a child getting trapped in the refrigerator during storage pull out and remove the door seal.

Children getting trapped in refrigerators is very dangerous.





#### When not using the refrigerator for a long time, unplug the power plug and open the doors to dry the refrigerator.

If the refrigerator is not dried sufficiently refrigerant may leak due to condenser corrosion and cause a fire or explosion.



Contact the retail store or municipal government for details about correct refrigerator disposal.

Improper disposal may cause refrigerant leaks, resulting in a fire or explosion if exposed to a flame.



If the refrigerant circuit (pipe) is damaged do not touch the refrigerator and avoid using flames. Open windows to ventilate

is damaged, contact the retail store





# Caution

## Installation and transportation

Anchor the refrigerator to a strong and level floor by adjusting the adjustable supports. Otherwise, the refrigerator may move and cause injury ▶ Pages 6 - 7



Be careful not to damage the floor or injure vourself when moving the refrigerator. Lay a protective sheet on the floor and move

the refrigerator slowly



Use protective



Do not pack in











The steel plates or other

parts may cause injury.

Do not place

glass bottles

in the freezer

compartments.

The bottle may break


if the liquid inside



Do not store

#### Observe the following when opening and closing the doors. •Do not open or close the doors when another

- person is touching the refrigerator. •Do not put your fingers on the top edge of
- a drawer-type door while closing it. Do not open or close the doors with excessive force
- (Food may fall out and cause injury.) ·Be careful not to trap your fingers or any other part of your body Be careful not hit a part of your body.





Do not eat food that is discolored or has a bad odour. Doing so may result in food poisoning or illness.






While cleaning the refrigerator, be sure to remove the shelves (made of tempered glass) and put them back properly Or else, the falling or smashed shelf could

Romove and put back shelves prope

Before

# From Installation to Operation



## Dedicated outlet that meets the specified rating.



Turn on the power of the refrigerator as soon as possible.

The refrigerator will not be damaged even if you turn on the power immediately after the installation

# Support cover

Support cover

The support cover is stored inside

the refrigerator compartment

• Installing the support cover

Insert the support cover horizontally

and fully, until it makes contact with

While the freezer door is open

# 2 Connect the power supply

\*Connect power supply soon after installing the refrigerator

# Installation

#### Install the refrigerator at:

- A place with good ventilation not exposed to direct sunlight or hot air To prevent a diminishing in cooling performance and to reduce power costs.
- A place with low humidity To prevent rusting, electric shock and fire.
- A strong and level place To prevent vibration and noise, and ajar or tilting doors

If the refrigerator supports sink easily into the floor material, lay a strong plate or board underneath. (To prevent deformation or discoloration due to the weight or heat.)

- A place away from other devices To prevent noise or video interference with devices such as televisions
- A place with at least 3 cm of space beside the left and right of the refrigerator, 10 cm of space from the top and 6 cm from the back. To allow heat to dissipate from the sides. top and the back of the refrigerator.

#### Use in hot spring areas

Corrosion control treatment may be required for the refrigerant circuit (pipe) due to generation of corrosive gases. Contact the retail store where you purchased the refrigerator.

## 

Do not obstruct the refrigerator vents or the space around the refrigerator. If refrigerant leaks, it may accumulate and catch fire or explode.

#### Use a dedicated outlet

Use a dedicated outlet for the power supply that meets the rating specified on the rating label. (The rating label is located on the door-liner of the refrigerator compartment.)

#### – ∕∖ Warning -

Using outlets that do not meet the specified rating or plugging in too many leads into a single socket can cause heat buildup or fire.

- The refrigerator will not be damaged even if the power is supplied soon after installation. It takes a while for the refrigerator to cool, therefore supply power as soon as possible.
- Electrical Connections Make sure this unit is properly grounded.

Extension cords are not recommended.

- The refrigerator should always be plugged into its dedicated electrical outlet. This will provide the best performance and prevent electrical circuits from being overloaded and causing a fire. Make sure that the electrical outlet provides the proper voltage.
- If your refrigerator is installed in the high humidity location, not only ground connection but also installation of the earth leakage breaker is
- If the power cord is damaged, purchase a new cord from
- MITSUBISHI ELECTRIC SERVICE CENTRE. Make sure that the power cord is designed for this model A qualified service person should only replace the power cord.

# 3 Adjustment and anchoring

Flat-blade

screwdriver


support

Adiustable Caster

(To prevent vibration, noise, movement, and aiar doors)


Turn the adjustable supports until they touch the floor and the front casters are raised from the floor.

Preventing aiar doors
 Adjusting a tilted door or unevenness



Bottom front of refrigerator

Readjust the adjustable supports as shown in the figures below. The right door tilts down The left door tilts down



If the installation location is not level or the supports sink after a few days due to the weight of the food. the doors may appear Readiust the supports.

Insert the blade of the screwdriver

Turn the adjustable supports

in the arrow direction until

If the supports are not

adjusted properly, the

refrigerator may move

and cause injury.

they touch the floor.

- ∕!\ Caution -

at shipment.


the rear side.

The support covers are designed for the left and right adjustable supports respectively.

#### If the door is still tilted after adjustment of the supports

When installing the refrigerator in the corner of a room, one of the rear supports may sink, causing the refrigerator to tilt. If this happens, use a caster support or strong board for adjustment

(Normally, use a board with a thickness of about 2 to 3 mm.)



# –∕҈N Warning -

If you notice a gas leak, do not touch the refrigerator. Open windows to ventilate. Sparks from an electrical contact

#### The operation noise gets louder immediately after installation.

Immediately after instillation, when: the weather is hot, the doors are frequently opened or closed, or any similar situation: the operation noise will get louder because the refrigerator will switch to high-speed operation to cool with high power.

## The outside of the refrigerator and the rotating partition get hot.

Heat radiation causes the temperature to rise to about 50°C to 60°C when operation is first started. and during the summer. The rotating partition may get hot when heated by the heater.



partition

## Cooling takes time after turning on the refrigerator.


- · Wait until the refrigerator has fully cooled before storing non-cooled food or ice cream.
- . Do not open the doors more than necessary, and close them as soon as possible.

When making ice for the first time

In the summer, it may take more than 24 hours.

## Prepare for earthquakes. (for earthquake prone areas)

Thread 2 strong belts through the hand-holds on the top rear of the refrigerator and anchor them to a strong location, such as wall or post. To obtain the refrigerator tipping prevention belts



## Do not damage the refrigerant circuit (pipes) or drive screws into it.

Although R600a refrigerants are combustible, the refrigerant circuit is hermetically sealed and normally leaks will not occur.

#### –∕<u>/</u>\ Warning -

Should the refrigerant circuit be damaged:

- 1. Do not use flames or electrical appliances nearby.
- 2. Open the windows to fully ventilate the room.


Then, contact the retail store where you purchased the refrigerator.

Operation


# **Using the Control Panel**

The control panel display light is normally turned off to save power.

- To check a setting status, turn on the display by pressing any button on the control panel.
- To set a section, press the relevant button when the control panel is illuminated.
- The control display panel turns off after 30 seconds if there is no operation to save power.

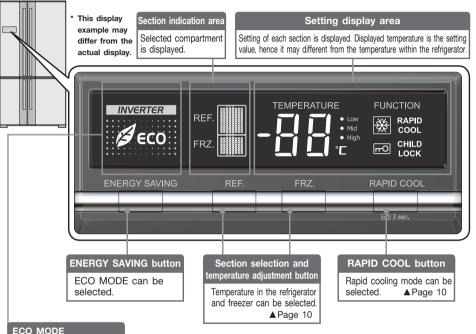

Use when you want to save power. When the temperature inside the refrigerator is stable, the power-saving operation is performed automatically. (Operates with the freezer compartment temperature set slightly higher.)



If ECO MODE is set, & is displayed. If switched to power saving operation while ECO MODE is set, **ECO** is displayed.

#### Tips for using the refrigerator wisely

#### Temperature settings

Setting each compartment to a relatively low operation reduces the consumption of electricity.

## Opening and closing compartment doors

The refrigerator consumes more electricity if you open and close the compartment doors frequently or leave the doors open for a long time.

#### ECO MODE

In this mode, the refrigerator automatically operates in an energy saving fashion when the temperatures are stable in the compartments. The refrigerator is not set in this mode when newly installed.


#### Storing foods

Do not stuff the compartments with too much food or do not place foods in manner to cover the cold air outlets. Or else, cold air does not flow through optimally in the compartments, causing the foods to take time getting cool or frozen and increase electric power consumption.

#### Child safety lock

Locks the control panel to prevent accidental button operations by children.

#### Setting the child safety lock




- Press FAPID COOL for about 3 seconds. (Until the buzzer sounds twice.)
- Even if the child safety lock is set, the compartment selection can be operated.

#### Reset the Settings

Returns the compartment selection, temperature control, ECO MODE, rapid cooling settings and temperature fine adjustment mode to their initial condition (at the time of purchase). Use for example if you have forgotten the settings.

#### Resetting



#### About the door alarm

The door alarm beeps when the refrigerator or freezer compartment door is opened for more than 1 minute.

The door alarm beep varies depending on how long the door has been opened. See below for details.

Door open time	1 minute	2 minutes	3 minutes	4 minutes	5 minutes or longer
Alarm	2 beeps	3 beeps	4 beeps	Continuous long beeps	Continuous short beeps

- The compartment displays on the control panel blink in time with the door alarm sounding.
- Check for an ajar door or trapped food (Door packing, rear side of the drawer cases). (Check at least once a month.)
- If the alarm keeps sounding even after closing the doors, contact the retail store where you purchased the refrigerator or MITSUBISHI ELECTRIC SERVICE CENTRE.

## If the control panel display blinks

The refrigerator is in the demonstration operation when the entire display blinks 3 times in regular intervals, or the compartment display and temperature control display blinks repeatedly in order.

The refrigerator does not cool in this mode.

Cancel the demonstration operation.

Page 16

# Setting the Refrigerator and Freezer compartment

# Setting the temperature in the refrigerator and freezer compartments



Press or to display the compartment that you want to set.

The compartment display changes each time the button is pressed.

Repeatedly press the temperature.

The High Mid Low display changes each time the button is

Temperature control					
Compartment too strong a little too strong Standard Standard		When you want to cool a little more • High	When you want to cool more  • High		
REF.	5°C	4°C	3°C	2°C	1°C
-16°C		-17°C	-18°C	-19°C	-20°C

- \*1: The setting at installation (at time of purchase).
- To control the temperature more precisely ▶ Page 17

\* Display example



- Before and after defrosting, the temperature inside the refrigerator may drop or rise temporarily.
- To prevent food freezing in refrigerator compartment in the following kinds of situations, set the refrigerator compartment temperature to "Mid Low" or "Low".
- When the refrigerator compartment temperature is set to "High" or "High Mid"
- In winter or at other times when the surrounding temperature is 5°C or less

# Rapid cooling



BAPD lights up.

 stops automatically after about 2 hours. (After stopping, RAPID goes off and the temperature reverts to the set temperature automatically.)

Stopping before the cooling ends

\* Display example


## When should I use ₩ ₩ ?

For example, after you have bought a lot of food and you want to freeze them quickly to preserve their freshness.

- · You can use rapid cooling even when other food
- The operation sounds gets louder during rapid cooling, because inner fans operate at high speed.

# Press to turn off RAPID COOL.

# **Refrigerator Compartment**

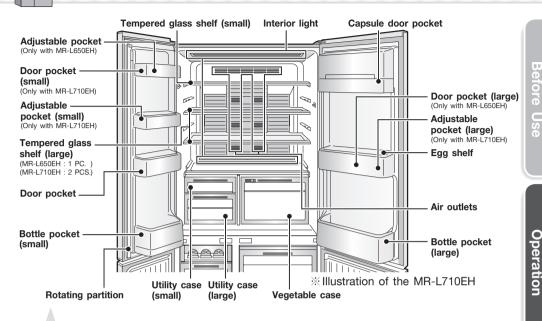

#### Do not close the door while the rotating partition is turned up to the front.

If you open or close the doors rapidly with force, the rotating partition may open to the front. Open and close the doors slowly (Otherwise damage may result.)




## Tempered glass shelf



While cleaning the refrigerator, be sure to remove the shelves (made of tempered glass) and put them back properly. Or else, the falling or smashed shelf could cause personal injuries.

## Vegetable case

Humidity of vegetable compartment can be adjusted.



- \* If food with a high level of moisture is placed near the air outlets, it may freeze. > Page 18
- If the door alarm sounds ▶ Page 9

## Wrap food that have strong odours thoroughly before storage

#### Food that transfers odours easily

Garlic, dried fish, fermented foods, beef, takuan, sardines, kimchi, chinese dumpling, etc.

· A slight odours may remain

#### Food to which odours are easily transferred

Puddings, ice cream, potato, salad, tofu, rice, bread, milk, cake, ice, etc.

· A slight odours may remain.

## Auto closer (equipped in doors)

With the door of the each compartment open at an angle of less than around 15 degrees, the door closes automatically

- The auto closer is not a function that automatically closes the door that opens slightly. The door may stop before closing completely if you swing close the door too softly.
- The amount of food inside the compartment may affect the closing speed.


Operation

# **Refrigerator Compartment**

# (Continued)

## Adjustable pockets

Adjustable to 2 positions




Relocate the pockets

Page 15

## Egg shelf

Egg holder or small organizing compartments.



Do not leave food hanging over shelves or pockets. Do not place glass bottles that cannot fit all the way to the bottom at the front of the bottle pocket.

The bottle may keep a door ajar, or the bottle may break



Do not close the door while food is in front of the Vegetable case or Utility cases.



Do not attach a case that vou purchased separately onto the outside of a pocket.


It may keep a door aiar and reduce the cooling performance, or food may fall and cause an injury or damage to a case or lid.



Fully stow away the cases.



# **Freezer Compartment**

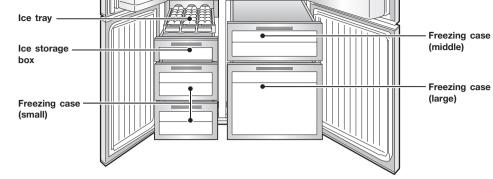

15 cm height of plastic bottles for freezing can be placed standing up in the Freezing case (large).

The bottles intended to let freeze are suitable. In many cases, they are displayed so.

■ If the door alarm sounds ▶ Page 9

Do not place tall objects in the lower freezing case.

- · Food or the slide case may be damaged.
- The door may not be closed.



# Tips for energy saving





Set to ECO MODE for automatic energy saving operation. Page 8



Keep space between items in the refrigerator.



Put items on the top shelf if you wish to cool sufficiently

Helpful storage

Allow hot food to cool before storing.



Avoid opening the door frequently or leaving the door open for a long time.



Be sure not to catch food items, plastic bags, power cord, etc. in the door when you close it.

Frost or dew build-up that may cause decline in cooling ability as a result of even the slightest door

Water may also drip off.

# Making ice cubes

Pour water into each of the section of the ice tray up to the water line.

The ice cubes will not separate easily from the ice tray if you add too much water



- Insert the tray completely into the ice tray holder.
- Once the ice cubes are made, turn the lever to the right until the ice cubes fall into the ice storage box.



# **Removing and Cleaning** the Parts

To return the parts, perform the removal procedures in reverse.

Step 1

# Before cleaning

Remove the power plug



Failure to unplug may result in an electric shock.

Wait at least 10 minutes before reinserting the power plug into the socket.

If you insert the plug immediately, the mechanism will not

# How to clean


- Wipe with a soft cloth soaked in lukewarm water, or remove the parts and (Wipe the control panel with a soft, dry cloth.)
- For stubborn dirt, wipe using water mixed with a weak concentration of kitchen only). In particular, be sure to wipe off oily dirt because leaving it may damage



Do not use following alkaline or low alkaline kitchen detergents. alcohol, benzene, thinner, oil, acid, scrubbers, boiling water, or Doing so may cause the plastic parts (such as the door or damage or rust the doors or painted surfaces.

rinse with water

detergent (neutral the plastic parts.



similar substances.

handles, caps and cases) to split

# Step 3

# After cleaning and periodically

#### Check the power plug and cord



For safety, clean periodically

- ① Unplug the power plug from the socket and check it. · Check for damage or abnormal heating on the power plug
- 2 Remove any dust from the power plug and surrounding area. and then wipe with a dry cloth.
- Firmly insert the power plug into the socket.

-∕!\ Warning If the power plug or cord is damaged or dust accumulates, it may cause an electric shock or a fire.

## Tempered glass shelves

## How to remove the upper shelf


Lift the upper shelf with Les both hands to take it out.



#### How to remove the middle and lower shelves

Remove the middle and lower shelves with both hands

Reverse the steps to put



. Do not let the tempered glass shelves fall off

### Ice trav / Ice storage box


- 1) Open the door.
- 2 Slide out the ice tray and remove.
- 3 Draw the ice storage case towards you and remove



## Cases in the Freezer compartment

Pull the case towards you. Hold the end on your side and lift the



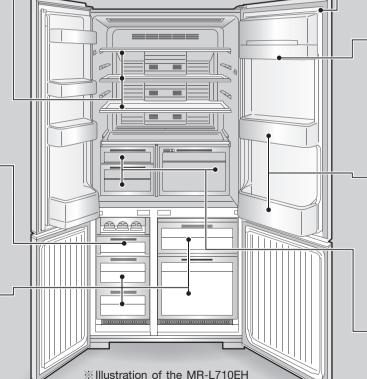

#### Door seal

Dirty seal is easily damaged and can cause refrigerated air to leak.



Door seal

#### Capsule door pocket

100 degrees.

1) Lift the cover by 2 Push the cover to one 3 Remove the cover side and remove it while towards you. pushing in the rib of the hinge cover with your finge







## Adjustable pocket / Bottle pocket

#### Adjustable pocket





- (1) Alternately lift up the left and right sides (the pockets are securely installed)
- 2 Pull towards you
- 3 Be sure to install the Adjustable pocket and the bottle pocket securely and correctly
  - (Or else, the pocket may fall off, causing a personal injury.)

## Utility case / Vegetable case

#### **Utility** case

- 1) Fully pull out the slide case.
- 2 Lift the end on your side.

#### Vegetable case

Lift the end on your side to pull out the Vegetable case.

\*The ceiling shelf on the upper side of cases cannot be removed.



## The rear of the refrigerator and the floor

- (1) Remove the support covers from the refrigerator.
- 2 Turn the adjustable supports to lift them from the floor and move the refrigerator off the wall. Use protective materials so as not to scratch the floor.
- ③ Wipe away all dust and soil from the rear of the refrigerator. the wall and the floor. Wipe them clean. Air circulation can cause dust to collect at the rear of and on the floor under the refrigerator, creating black soiled areas. Clean the area periodically as it also contributes to energy saving.
- (4) Check the floor for a sign of water leaks from the refrigerator.

## √!\ Caution -

Do not put your hands, fingers or feet underneath the refrigerator. Doing so can cause injury.

## Replacing lamps in compartments

LEDs in the refrigerator compartments and behind of Vegetable case.

Contact the retail store at which you purchased this refrigerator from or MITSUBISHI ELECTRIC SERVICE CENTRE.

#### Control panel

#### Wipe with a soft dry cloth.

\*Do not use alcohol, benzene, steel wool or alkaline-base detergents. They can cause the control panel to malfuction.


# Other Issues

Issue	Action
A power outage occurs	Minimize the frequency of opening the doors, and avoid adding more food.     Control panel settings other than the temperature settings may change. Check the settings. (Child safety lock rapid cooling etc.)
To move the refrigerator or change its orientation	Remove support covers.     Raise the adjustable supports. ▶ Page 7     Lay protective material under the casters and rear supports to prevent floor damage.     Move the refrigerator to the forward and backward directions.     * Dragging in directions other than forward and backward may damage the floor.
When not using the refrigerator for a long time	Remove all stored food from inside the refrigerator.     Unplug the power plug, clean the interior of the refrigerator, and open the doors for 2 to 3 days to dry the inside.     If the refrigerator is not dried sufficiently, it may cause mold, odors, or refrigerant (gas) leaks due to condenser corrosion.
To transport the refrigerator (when moving house, etc.)	<ul> <li>© Empty any water or ice from the ice tray.</li> <li>② Wear protective gear (gloves).</li> <li>③ Remove the support cover and raise the adjustable supports.</li> <li>③ Unplug the power plug.</li> <li>⑤ Lay towels under the drainage port and the lower rear edge of the refrigerator, and position a container or tray with a height of about 3 cm on the towels to collect the water.</li> <li>The towels prevent floor damage, and water from being spilled on the floor.</li> <li>⑤ Till the refrigerator slowly to the rear by about 30 degrees, and drain the water from the evaporation tray via the drainage port on the lower rear side. (The evaporation tray is not visible from the outside.)</li> <li>Because the refrigerator is heavy, the work must be performed by at least 2 people.</li> <li>The work must not be performed by small children or people who are not capable of doing heavy work. Ask a specialist transportation company.</li> <li>4 or more people should hold the hand-holds on the lower inside of the front and the upper side of the rear, and carry the refrigerator on its side. (The compressor may be damaged.)</li> <li>Front Lower interior</li> </ul>

#### Demonstration operation status

When the entire display blinks 3 times at a certain interval even though you have not operated any buttons

When the compartment displays and temperature control displays on the control panel blink in order



① Keep the doors of the refrigerator compartment open.

RAPID COOL at the same time for about 5 seconds.

the refrigerator, or cancel the demonstration operation with the procedure below.

3 Make sure that there is no blinking of the display area for after a minute. (If the display still blinks, the demonstration operation has not been canceled.)

When the blinks rapidly (about Contact the retail store where you purchased the refrigerator as soon as possible. Alternatively, contact MITSUBISHI ELECTRIC SERVICE CENTRE. 5 times per second) or the alarm cannot be turned off

and at the same time for about 3 seconds to stop the alarm. An inspection is required. Contact the retail store where you purchased the refrigerator or a MITSUBISHI ELECTRIC SERVICE CENTRE or Customer Service representative.

When the refrigerator or freezer compartment is selected. you can control the temperature more precisely. • When temperature fine adjustment mode is set, the compartment display blinks about every 10 seconds. Setting the temperature fine adjustment mode Press and at the same time for about 3 seconds. (Until the buzzer sounds twice.) To cancel The same operation as above. Performing the temperature fine adjustment To control the Example: To set the refrigerator compartment temperature more precisely display the compartment (Temperature fine for which you want to "RFF" blinks • High adjustment mode) perform fine temperature twice about every 10 seconds fine adjustment of the temperature The values on the right are approximate. The temperature may differ from the values on the right, depending on factors such as the food storage condition and This represents a blinking display.

	Refrigerator or freezer compartment	
• Low	Low setting  Note 1: ▶ Page 10	
• Low • Mid	About 0.3°C lower than "Low"	
● Low ● High	About 0.6°C lower than "Low"	
• Low • Mid	Low medium setting ► Page 10	
● Low ● Mid	About 0.3°C higher than "Mid"	
● Mid	Medium setting ▶ Page 10	
● Mid ● High	About 0.3°C lower than "Mid"	
● Mid ● High	Medium high setting  ▶ Page 10	
● Low ● High	About 0.6°C higher than "High"	
● Mid ■ High	About 0.3°C higher than "High"	
• High	High setting ▶ Page 10	

# **Specifications**

This appliance is designed for use in Australia, New Zealand only and can not be used in any other country.

No servicing is available outside of Australia. New Zealand.

	Accesories	Units	
	Model	MR-L650EH	MR-L710EH
	Tempered glass shelf (small)	1	1
	Tempered glass shelf (large)	1	2
	Utility case (small)	1	1
Ħ	Utility case (large)	1	1
Refrigerator Compartment	Vegetable case	1	1
art	Adjustable pocket	1	-
l m	Door pocket (small)	-	1
ŏ	Adjustable pocket (small)	-	1
ator	Door pocket	1	1
Jerz	Bottle pocket (small)	1	1
əfriç	Capsule door pocket	1	1
ď	Door pocket (large)	1	-
	Adjustable pocket (large)	-	1
	Egg shelf	1	1
	Bottle pocket (large)	1	1
Ħ	Ice tray	1	1
er	Ice storage box	1	1
Freezer	Freezing case (small)	2	2
Freezer Compartment	Freezing case (middle)	1	1
ŏ	Freezing case (large)	1	1
	Leg cover (Right and Left)	2	2

When in trouble

Operation

This is the creaking sound as warm air enters and

This is the operating sound of the damper as it adjusts

expands the plastic.

the air flow.

# When in trouble

Page 16

First, check the items described in this section. If the problem persists, contact the retail store where you purchased the refrigerator as soon as possible.

Frequently asked questions in the initial period and in summer

# The refrigerator does not cool at all!

- The refrigerator takes time to cool when you first start using it.
   Especially in the summer, it may take up to 24 hours for the inside to be fully cooled.
- Are the displays on the control panel blinking?
- → Demonstration operation:
- Is the power plug disconnected or has the circuit breaker tripped?

#### The outer walls heat up!

- The outer walls heat up significantly (to about 50 to 60°C) immediately after installation and in the summer. This is because the heat discharging and condensation prevention peeps are located on the sides and the top of the refrigerator.
   They are required for cooling and the heat is not an abnormalit
- The refrigerator compartment rotating partition also has a condensation prevention heater that heats up.
- A heat discharging fan is located at the bottom of the refrigerator. Warm air may be blown from here.

Problem

Does not cool well

Not much ice is

Food freezes in the refrigerator compartment

Cannot adjust the temperature

forms on the outer

walls and inside the

Frost forms in the

freezer compartment

Water drips onto the

Doors open easily

Doors do not close

refrigerator and a door?

3 Is the refrigerator installed stably?

Are the adjustable supports making contact with the

Condensation

refrigerator

floor

made

Ice melts



Questions about operation and handling

# The control panel turns off automatically!

• To save power, the display goes off if there is no operation for about 30 seconds. 

• Page 8

# Strong odours on the food or ice!

Have you placed food with strong odours inside the refrigerator without sealing in a container?
 Page 1:

3 Lower the adjustable supports to raise the front side

▶ Page 7

slightly and make the doors easier to close

s is wention of the MR-L710EH  sealing in a container?  sealing in a container?  **Illustration of the MR-L710EH	Page 11
Check Explanation and action	n
sunlight. air being blocked? Are the doors  4 Check the quantity of food inside and ajar of	o make ice. ctly. • Page 6
on the control panel set to "High"?  If moisture stored at the rear of the temperature 5°C or less?  Set the temperature to "Mid". Note that in the respectation, the temperature inside the refrigerator drog. Place drinks and food containing a lot of m such as tofu, vegetables and fruit, at the from temperature 5°C or less?  Settings of the refrigerator compartment are set to "Low".	os temporarily. loisture, ont. temperature
①Cancel the child safety lock.	Page 9
g opened frequently, or is a door condensation. Even when a door is open or it can cause frost or condensation, or drippi the floor.  h, for example is it raining?  ©Condensation may form temporarily. Wipe o dry cloth. It is also easy for frost to form in compartment. Minimize the time that the doo	nly slightly, ing onto Page 12 off with a the freezer
ontact with food or a case?  Decorated with food or a case?  with objects when closed.  Premove any objects. Make sure that the dor another object trapped between the	or does not

Problem (	Check	Explanation and action	
Door alarm sounds	Is the door of the refrigerator or freezer compartments open?      Is the rotating partition of the refrigerator compartment turned up to the front?	<ul> <li>         ①Close the door. The alarm sounds at every minute after the door is opened, and after 4 minutes it sounds continuously.     </li> <li>         If the alarm sounds even after closing the door, press the ENERGY SAVING button and RAPID COOL button at the same time for about 3 seconds to stop it. An inspection is required. Contact the retail store where you purchased the refrigerator or MITSUBISHI ELECTRIC SERVICE CENTRE. ▶ Pages 9, 16</li> <li>         ②Check the position of the rotating partition while the doors are open.     </li> </ul>	
Ice cube is small or joined together	①Has ice been stored inside for a long time?	①If the ice is stored for a long time, ice cubes may s together or shrink.  (Due to a phenomenon called sublimation.)	
Noise interferes with televisions or other devices	Sthe refrigerator installed near to an electronic device such as a television?     Sthe power to the refrigerator supplied from a socket near the entry hole of the antenna cable?	Install the refrigerator away from electronic devices such as televisions.      We recommend using a dedicated power supply.	
Loud noises Annoying noise (These noises are normal.)	<ul> <li>The noise gets louder suddenly or the tone changes.</li> <li>A whistling sound is made after closing a door.</li> <li>A hissing, bubbling or running water sound is made sometimes.</li> </ul>	①Immediately after installation, when the weather is hot, when the doors are frequently opened and closed, during the rapid cooling operation, and in similar situations, the refrigerator switches to high-speed operation and cools with high power. ②This is the sound of the fan motor starting. ③This is the sound of the refrigerant (gas) flowing.	

#### CAUTION

1. This appliance is designed for use in ambient temperature listed below.

SA buzzing sound is made sometimes.

from inside the refrigerator after a door is opened.

MODEL NAME	AMBIENT TEMPERATURE RANGE	CLIMATIC CLASS
MR-L650EH, L710EH-A	16 °C ~ 43 °C	Т
MR-L650EH, L710EH-NZ	16 °C ~ 43 °C	Т

The internal temperatures could be affected by such factors as the location of the refrigerating appliance, ambient temperature and the frequency of door opening, and, if appropriate, a warning that the setting of any temperature control device might have to be varied to allow for these factors.

- 2. A rise in temperature of the frozen food during manual defrosting, maintenance or cleaning could shorten the storage life.
- 3. Food to be frozen is not to be placed in direct contact with food in storage and, if appropriate, that it could be necessary to reduce the quantity to be frozen if freezing every day is anticipated.
- 4. The electrical power failure for 1-2 hour will only slightly effect the inside temperature. However, open & close of the door results in the temperature loss. In case there is more than 24 hours electrical power failure, the food should be taken out from the fridge.
- 5. In case you are leaving or there is no food in the fridge for more than 3 weeks, The fridge should be unplugged and cleaned.

When

ᆵ

trouble

- This refrigerator uses flammable foaming gas for insulation
  - Please deliver the unit to specialized industrial waste dealer when you do away it. Please follow the rules in your country.
- WARNING Do not use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer.
- WARNING Do not use electrical appliances inside the food storage compartments of the appliance, unless they are of the type recommended by the manufacturer.
- WARNING Just in case of having damaged the refrigerant circuit, do not use electric items or fire equipment near by, and open the window to ventilate the room. And contact the retail store at which you purchased it or the following MITSUBISHI ELECTRIC SERVICE CENTRE.

- The refrigerator contains flammable refrigerant (R600a: isobutane).
- The refrigeration system behind and inside the refrigerator contains refrigerant.
  Do not allow any sharp objects to come into contact with the refrigeration system.
- Do not block the openings on the circumstances of the refrigerator.
- The user manual should be handed over to any person who would use or handle the refrigerator whenever the refrigerator would be transferred to another location and delivered to a recycling plant.
- The appliance is not intended for use by young children or infirm persons without supervision.
- Young children should be supervised to ensure that they do not play with the appliance.

## **R600a Refrigerant Warning**

- This appliance contains a small quantity of R600a refrigerant which is flammable.
- During transportation and installation, ensure that the tubing of the refrigerant circuit is not damaged.
- · Leaking refrigerant can ignite and may damage the eyes.
- In the event any damage does occur, avoid exposure to open fires and any device which creates a spark. Disconnect the appliance from the mains power.
- Thoroughly ventilate the room in which the appliance is located for several minutes.
- Notify Mitsubishi Electric Australia Pty Ltd. for necessary action and advice.
- The room for installing the appliance must be at least 1 cubic metre per 8 grams of refrigerant. The refrigerant quantity contained in this appliance is noted on the Rating Label of the appliance.
- If your Mitsubishi Electric Refrigerator should require service, please contact Mitsubishi Electric Australia Pty Ltd see back page of this user manual for contact details.

# NOTE: MITSUBISHI ELECTRIC AUSTRALIA PTY LTD. DO NOT ALLOW SERVICE TO THE REFRIGERATION CIRCUIT OF THIS APPLIANCE.



If an abnormality or malfunction occurs, stop operation immediately and contact the retail store where you purchased the refrigerator or MITSUBISHI ELECTRIC SERVICE CENTRE or its service agent.

# SOLE AGENT in Australia MITSUBISHI ELECTRIC AUSTRALIA PTY LTD.

(Incorporated in New South Wales) ABN 58 001 215 792

**New South Wales:** 

348 Victoria Road, Rydalmere NSW 2116 Phone: (02) 9684 7777, Fax: (02) 9898 1043 **Queensland:** 

Da Vinci Business Park, Building 101, 2A Boronia Road, Brisbane Airport QLD 4008

Phone: (07) 3623 2000, Fax: (07) 3860 6761

South Australia / Northern Territory:

Suite 1, 224 Glen Osmond Road, Fullarton SA 5063 Phone: (08) 8338 1001, Fax: (08) 8338 0501

Western Australia:

Unit 5, 329 Collier Road, Bassendean WA 6054 Phone: (08) 9377 3400, Fax: (08) 9377 3499 **Victoria / Tasmania:** 

Unit 5, 12 Compark Circuit Mulgrave VIC 3170 Phone: (03) 9535 7800, Fax: (03) 9535 7801

# SOLE AGENT in New Zealand BLACK DIAMOND TECHNOLOGIES LIMITED (BDT)

Wellington Office (Head Office)

1 Parliament Street Lower Hutt PO Box 30772 Phone: (04) 560 9147, Fax: (04) 560 9133 Auckland Office

Unit 1, 4 Walls Road Penrose PO Box 12726 Phone: (09) 526 9347, Fax: (09) 526 9348 Christchurch Office

44 Halwyn Drive Hornby PO Box 16904 Phone: (03) 341 2837, Fax: (03) 341 2838

# MITSUBISHI ELECTRIC CORPORATION