

PUZ-WM85VAA-BS

AIR-TO-WATER HEAT PUMP



Heating Capacity: 8.5kW
Cooling Capacity: 7.5kW

Key Benefits:

- ✓ Low operation costs
- ✓ Superior performance in cold conditions
- ✓ Low carbon footprint
- ✓ Whole home comfort
- ✓ Mitsubishi Electric quality

High Efficiency Performance



- ^{*1} Under nominal heating conditions at outdoor temp 7°C, outlet water temp 35°C, inlet water temp 30°C, as tested to EN14511 standard.
- ^{*2} Under nominal cooling conditions at outdoor temp: 30°C, outlet water temp 7°C, inlet water temp 12°C, as tested to EN14511 standard.
- ^{*3} At 1m from outdoor unit, as tested to EN12102 standard.
- ^{*4} Under nominal heating conditions at outdoor temp -10°C, outlet water temp 45°C, inlet water temp 40°C, as tested to EN14511 standard.
- ^{*5} Regular maintenance inspections and washing the unit with fresh water are recommended. Any scratches should be repaired as soon as possible. Visit our website for more details.

ecodan[®]

AIR-TO-WATER HEAT PUMP

Key Features

Maintains Full Capacity at Low Ambient Temperatures

The PUZ-WM85VAA-BS can maintain its full heating capacity right down to -10°C^{*4}, making it the dependable solution for year-round efficient water heating, and ultimate performance during the winter.

Ultra Quiet Noise Level

Specific design features ensure this Ecodan Series operates discreetly with industry leading noise levels rated at 45dBA^{*3}. As a result homeowners can now choose the most convenient location for their Ecodan without disturbing neighbours.

Anti-Corrosion Treatment

It is well known that salt spray from the ocean and onshore winds accelerate the corrosion of metal surfaces. While Ecodan standard models come with excellent corrosion resistance, the -BS models go a step further by treating external panels with acrylic resin and ensuring other key elements of the unit are given extra protection from salt spray in coastal environments.^{*5}

Heating and Cooling Modes

As a reversible heat pump, the PUZ-WM85VAA-BS can heat or cool water loops, making it ideal for hydronic whole home comfort throughout the seasons.

High Efficiency Plate Heat Exchangers and Inverter Driven Compressor


High performance is achieved with the use of efficient plate heat exchanger technology, coupled with low Global Warming Potential R32 refrigerant, and inverter compressor technology.



Specifications

PUZ-WM85VAA-BS Air-to-Water Heat Pump

OUTDOOR UNIT			PUZ-WM85VAA(-BS)
WATER DATA	Outdoor Connection		1" BSP Parallel Thread ISO 228/1-G1B
	Heating Flow Rate Range	[L/min]	10.8 – 24.4
	Heating Flow Temp. Range	[°C]	20 – 60
	Cooling Flow Temp. Range	[°C]	5 – 25
OPERATING OUTDOOR TEMPERATURE RANGE	Heating	[°C DB]	-20 ~ +24
	DHW	[°C DB]	-20 ~ +35
SOUND PRESSURE LEVEL	SPL at 1m	[dBA]	45 ^{*1}
REFRIGERANT DATA	Type		R32
	Charge	[kg]	2.2
DIMENSIONS	Width	[mm]	1,050
	Depth	[mm]	480
	Height	[mm]	1,020
WEIGHT		[kg]	98
ELECTRICAL DATA	Electrical Supply		1ph, 230V, 50Hz
	Nominal Running Current ^{*2} (MAX)	[A]	9.1 (22)
	Fuse Rating	[A]	25

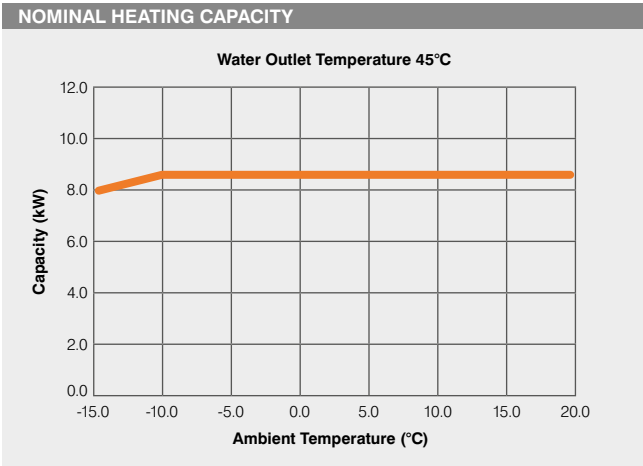


	CAPACITY (kW)	COP ^{*3}
HEATING		
A7 / W35	8.5	4.80
A2 / W35	8.5	3.51
A-7 / W35	8.5	2.60
COOLING		
A30 / W7	7.5	3.71
A30 / W18	7.5	7.07

A = Ambient Outside Air Temperature (°C)
W = Water Flow Temperature (°C)

^{*1} Sound pressure level at 1m from unit, as tested to EN12102 standard.
^{*2} Under nominal heating conditions at outdoor temp: 7°C, outlet water temp: 35°C.
^{*3} Tested to EN14511.

PUZ-WM85VAA-BS Dimensions

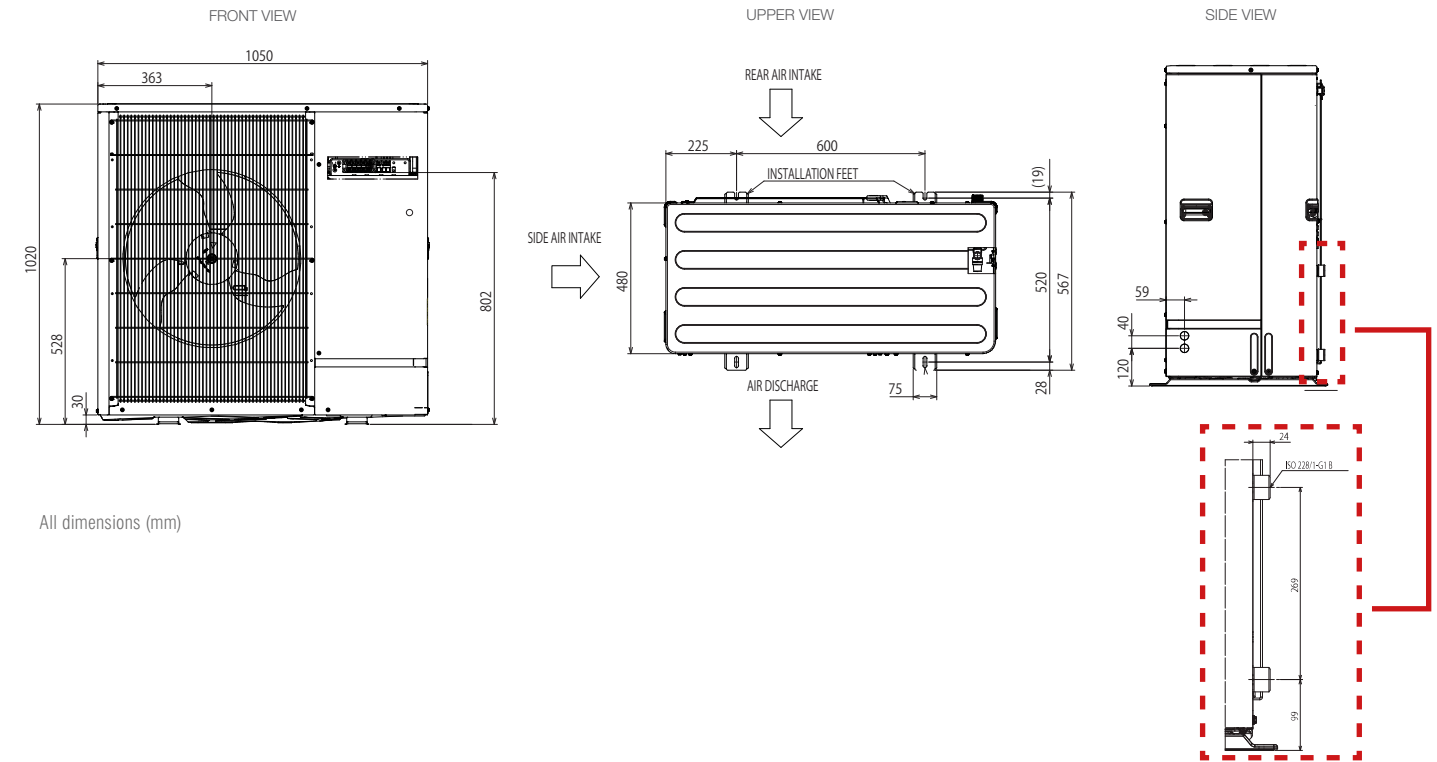

For more information please visit our website
or call our Hot Water Sales Team.
www.mitsubishi-electric.co.nz | 0800 784 382

PUBLISHED JUN 2026

PLEASE LOOK AFTER THE ENVIRONMENT AND RECYCLE